

Window Blinds



Model: Allusion Blinds With Double Wand Operation

Size: Custom

Support Material: Aluminum

Finish: Custom Finish

Installation: Optional

Brand: NERVAL

 Additional Feature: Wireless remote controller available

Warranty: Limited 1 year

Features:

- Ideal for large windows and bifold or patio doors.
- With the doors open and the blind drawn closed, easily access the outside space by walking through the individual louvres.
- Filter daylight and retain the view.
- A robust and reliable, industry leading blind system, made of high quality plastic, stainless steel and aluminium with corrosion resistant finishes.

- 5m length (16'3") tracks available for wider windows and doors.
- Choose between the Allusion®
 Fascia or the sleek Louvolite
 Slimline® Vogue headrail.
- UV stabilised prime plastics used to guard against ultraviolet degradation.
- Can be used as room dividers to create sectioned spaces in hotel lobbys, restaurants or large conference rooms.


- Child safe operating wand option available.
- Using the Slimline® Vogue headrail, Allusion® can be motorised (tilt only) using Louvolite One Touch™ Vogue motorisation. Max 3m width. Motorisation not available with the Allusion® Fascia.
- Colours available: white, black and anthracite grey.

Disclaimer: Nerval makes every effort to provide accurate specification data. However, specification may change without notice. Please visit nerval website to see NERVAL'S TERMS AND CONDITONS.



Window Blinds

Hardware Details:

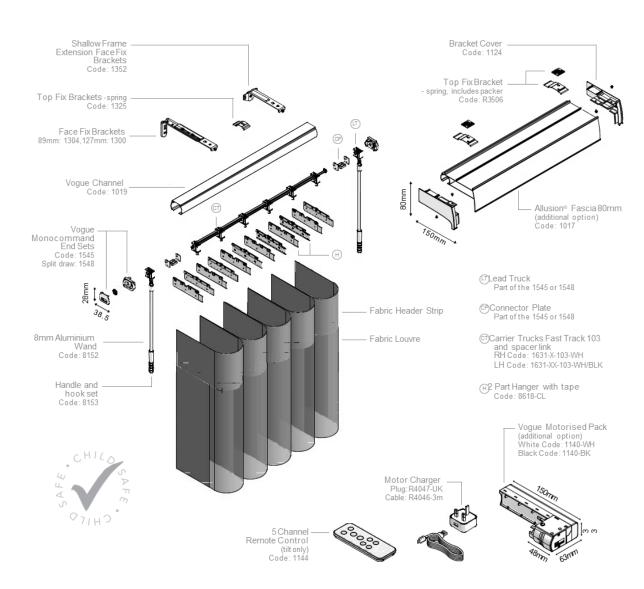



Disclaimer: Nerval makes every effort to provide accurate specification data. However, specification may change without notice. Please visit nerval website to see NERVAL'S TERMS AND CONDITONS.





Window Blinds


Bracket Mount Options:











- A. 1340 adjustable face fix brackets
- B. 1352 shallow frame extension face fix brackets
- C. 1325 top fixbrackets (spring)
- D. Extension top fix brackets; 1342: 80mm/180mm;
- 1341:130mm/230mm; 1351:160mm/260mm
- E. R3506 top fix bracket (spring) & packer (use with 1017)

NOTE: Plywood blocking is recommended for secure connection.

BUNCHING OPTIONS AND STACKING DISTANCES

BUNCHING	ONE WAY	SPLIT	CENTRE
103mm (4") louvres	225mm (8¾") for 1st metre (3'3") width of blind. 175mm (7") foreach additional metre	225mm (8¾") for 1st metre (3'3") width of blind. 175mm (7") foreach additional metre	165mm (6½") for 1st metre (3'3") width of blind. 165mm (6½") for each additional metre

Disclaimer: Nerval makes every effort to provide accurate specification data. However, specification may change without notice. Please visit nerval website to see NERVAL'S TERMS AND CONDITONS.